


Ovation™ Paring Switch OP-10

Single gang wall-mounted remote power and pairing switch for Ovation™ audio systems.

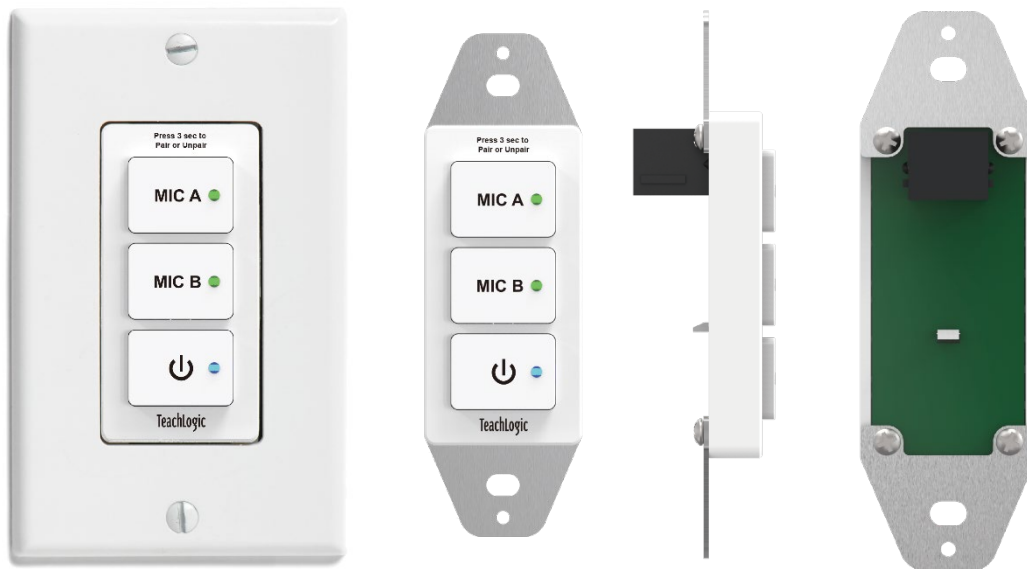

Specifications

Compatible with	OA-50 Amplifier/Receiver/Mixer
Cable connectors	RJ-45, both ends; customer-supplied
Maximum distance	23m (75'), CAT5 or CAT6 cable
Power Requirements	None.
Mounting	Single-gang box, or shared box. Standard electrical box, mud-ring, or low voltage ring.
Cover Plate for Trim	Any Leviton Decora™ switch cover plate
Hardware supplied	#6-32 screws to secure to electric box
Weight	31g (1.1 oz)
Dimensions	105 x 27 x 33mm (4.13 x 1.07 x 1.31 inch)

Features

- Elegant simple design for intuitive use.
- Fits any standard Decora™ switch cover plate enabling inexpensive matching to other switch plates in room.
- RJ-45 jack has open side downwards to avoid its catching debris
- If an OA-50 needs to be placed in an area or compartment that is not easily accessed by the user, an OP-10 Wall Mount Control Panel can be used to allow limited remote control including pairing and un-pairing microphones from an OA-50, turning an OA-50 On and Off, putting the OA-50 into or out of Standby Mode, and radio-resetting the OA-50.
 - Pressing an OP-10 pair button has the same effect as pressing a pair button on the OA-50.
 - Pressing the power button on the OP-10 has the same effect as pressing the logo button on the OA-50.
 - Lights on the OP-10 indicate pairing and connection status by duplicating certain illuminations of the front panel pairing indicators on the OA-50.
 - The indicator light next to the OP-10 power button mimics that on the OA-50 logo button showing solid blue (On), intermittent softly blinking blue (Standby), and no light (Off). Standby blink designed to be not distracting.
 - During radio-reset, all three LED indicator lights will blink three times.